


DYNAMIC PROGRAMMABLE LIGHTS



“Where Light Meets Design”

PIXEL POINT LIGHT 50mm

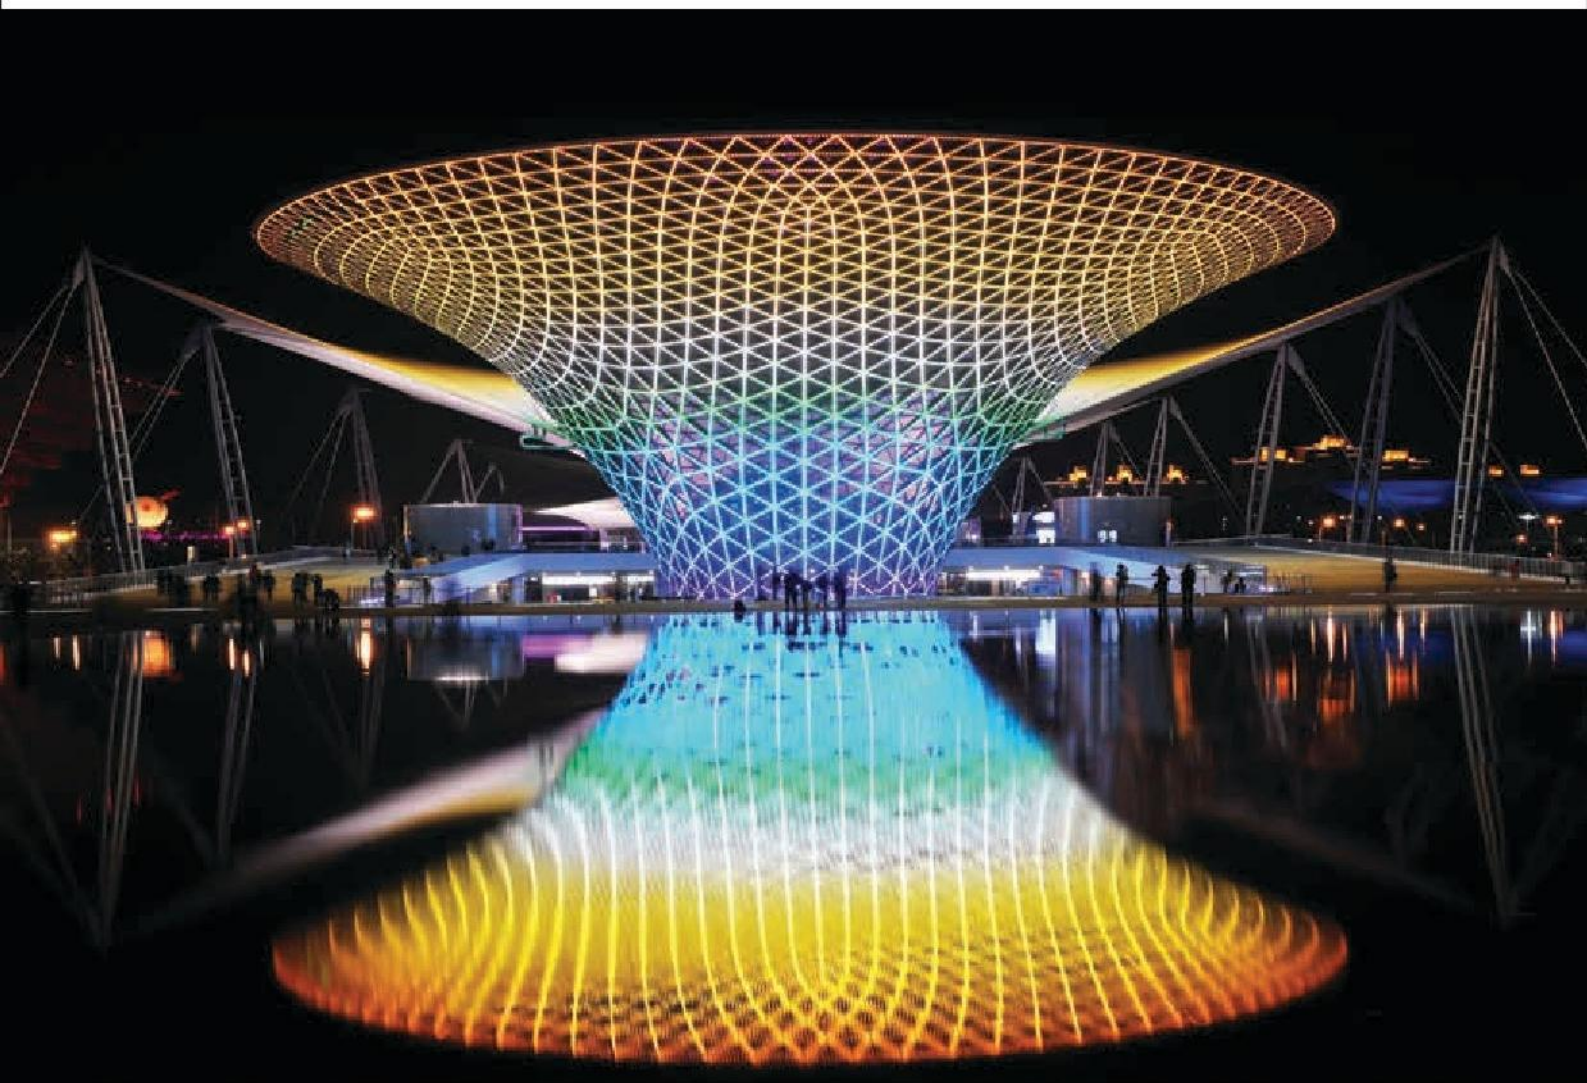

PRODUCT INFORMATION

Operating Voltage(V)	DC 24V
Wattage(W)	1.2-1.64W
Light Source	SMD3535
Color Temperature	W/Y/WW/TTLRGB/DMXRGB/DMXRGBW
Controller Method	TTL/DMX512
Material	PC
Beam Angle	120 Degree
IP Rating	IP 66
Working temperature (°C)	-20 (°C)to + 60 (°C)
Life time	>50,000 Hours



STRIP LIGHT



PRODUCT INFORMATION

Operating Voltage(V)	DC 24V
Wattage(W)	18 W/M
Pixel/M	10 IC/M
Light Source	SMD5050
Color Temperature	W/Y/WW/TTLRGB/DMXRGB/DMXRGBW
Controller Method	TTL/DMX512
Beam Angle	120 Degree
IP Rating	IP 67
Working temperature (C)	-20 (°C)to + 60 (°C)
Life time	>50,000 Hours



R I G I D L I G H T



PRODUCT INFORMATION

Operating Voltage(V)	DC 24V
Wattage(W)	18 W/M
Pixel/M	10 IC/M
Light Source	SMD5050
Color Temperature	W/Y/WW/TTLRGB/DMXRGB/DMXRGBW
Controller Method	TTL/DMX512
Housing Materials	Aviation Aluminum 6063
Beam Angle	120 Degree
IP Rating	IP 67
Working temperature (C)	-20 (°C)to + 60 (°C)
Life time	>50,000 Hours

