







1.LEDS

High-power LEDs COB,offering high performance in an easy to use platform. Light colors: Warm white, Neutral white.

2.Housing

Made of die-casting aluminum and designed in support of the heat dissipation function. The latest heat dissipation housing, with optimized heat dissipation structure, wich felicitate the heat exchange quickly from aluminum alloy die-casting housing to the air.

3.Lens System

Transparent polycarbonate lens cover, with 98% diffusing efficiency.

4.Adapter

Providing adapters of 3 phase in order to meet requirements of installation.

5.Structure design

Housing and driver separated, with better heat dissipation, can effctively extend the lifespan for the light. The fixture security for suspicion locked used. Solution available for different assembling: Horizontal Track type, Surface-mounted type.

6.Flicker

Flicker free





Suitable for indoor use



Comply with CE certification



The electrical grade is class 1



Protection level is IP20





High efficiency reflector



(RI >> 90

2 Years Guarantee

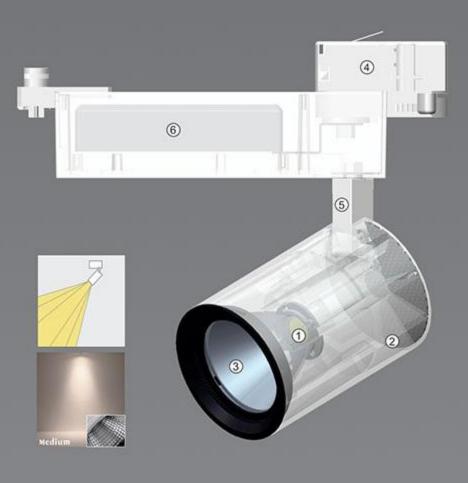

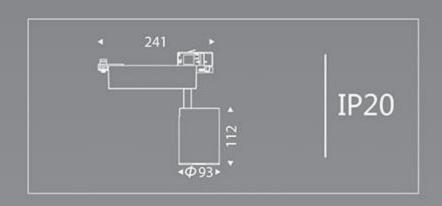








Track

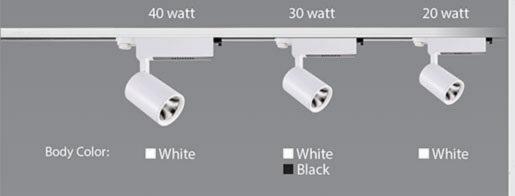


Surface mounted



iTRACK



iTrack - 20	iTrack - 30	iTrack - 40	نام محصول : Order No.	
20 watt	30 watt	40 watt	توان : Led Power (w)	
220 V	220 V	220 V	: ولتاژ Voltage	
2100 Lm	2980 Lm 3080 Lm	4000 Lm	: شدت نور Hot Lumen (Lm)	
2700 K	2700 K 4000 K	2700 K	رنگ نور : CCT (K)	
93	93	93	ضریب نمود رنگ : CRI	
25	25	25	ز اویه تابش نور : Angle	
White	White Black	White	رنگ بدنه Body Color	

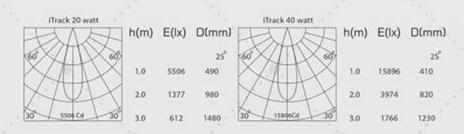

iTrack 30 watt			
HAMAH	h(m)	E(lx)	D(mm
66 1 66			25°
IX/IIIXX	1.0	9340	470
XIVX	2.0	2335	840
30 19340 Cd 30	3.0	1038	1410

