



Products Code : Line Light 1707 / 1715



Light Sources	Power Per Meter		Luminous Per Meter		CCT Color Temperature		CRI Color Rendering Index
Mid-Power	12	Watt	1200	Lumen	3000	Kalvin	> 80
High-Power	24	Watt	2500	Lumen	4000	Kalvin	
High-Efficiency	24	Watt	3500	Lumen	6000	Kalvin	

Standards / CE / / /

Powered By :

Accessories	Fixtures	End Cap
Line Light 1707		
Line Light 1715		

Profile Dimensions	Width	Height	Length
Line Light 1707	17 mm	7 mm	Per Order
Line Light 1715	17 mm	15 mm	

Material / Profile: Anodized Aluminum / Diffuser: PMMA

Product Code : Line Light 1612H / 1712



Light Sources	Power Per Meter	Luminous Per Meter	CCT Color Temperature	CRI Color Rendering Index
Mid-Power	11 Watt	1200 Lumen	3000 Kelvin	> 80
High-Power	23 Watt	2500 Lumen	4000 Kelvin	
High-Efficiency	23.4 Watt	3500 Lumen	6000 Kelvin	

Standards / CE / RoHS / REACH / UL

Powered By: **MW** LED SYSTEM

Accessories	Fixtures	End Cap
Line Light 1612H		
Line Light 1712		

Profile Dimensions	Width	Height	Length
Line Light 1612H	16 mm	12 mm	Per Order
Line Light 1712	17 mm	12 mm	Per Order

Material / Profile: Anodized Aluminum / Diffuser : PMMA



Products Code : Line Light 1602 / 2623



Light Sources	Power Per Meter		Luminous Per Meter		CCT Color Temperature		CRI Color Rendering Index
Mid-Power	12	Watt	1200	Lumen	3000	Kalvin	> 80
High-Power	24	Watt	2500	Lumen	4000	Kalvin	
High-Efficiency	24	Watt	3500	Lumen	6000	Kalvin	

Standards /  /  /  / 


Powered By : 

Accessories	Fixtures	End Cap
Line Light 1602		
Line Light 2623		

Profile Dimensions	Width	Height	Length
Line Light 1602	20 mm	20 mm	Per Order
Line Light 2623	26 mm	23 mm	

Material / Profile: Anodized Aluminum / Diffuser : PMMA

Product Code : Line Light 3030



Line Light : Code 3030

Light Sources	Power Per Meter		Luminous Per Meter		CCT Color Temperature		CRI Color Rendering Index
Mid-Power	12	Watt	1200	Lumen	3000	Kelvin	> 80
	24	Watt	2400	Lumen			
High-Power	24	Watt	2500	Lumen	4000	Kelvin	
	48	Watt	5000	Lumen			
High-Efficiency	24	Watt	3500	Lumen	6000	Kelvin	

Standards / CE / RoHS / A++ / ENEC

Powered By : 

Accessories	Fixtures	End Cap
Line Light 3030		

Profile Dimensions	Width	Height	Length
Line Light 3030	30 mm	30 mm	Per Order

Material / Profile: Anodized Aluminum / Diffuser : PMMA


Product Code : Line Light 2114TL / 7012TL



Light Sources	Power Per Meter		Luminous Per Meter		CCT Color Temperature		CRI Color Rendering Index
Mid-Power	12	Watt	1200	Lumen	3000	Kalvin	> 80
High-Power	24	Watt	2500	Lumen	4000	Kalvin	
High-Efficiency	24	Watt	3500	Lumen	6000	Kalvin	

Standards /    

Powered By: 

Accessories	Fixtures	End Cap
Line Light 2114TL		
Line Light 7012TL		

Profile Dimensions	Width	Height	Length
Line Light 2114TL	21 mm	14 mm	Per Order
Line Light 7012TL	70mm	12 mm	Per Order

Material / Profile: Anodized Aluminum / Diffuser : PMMA



Products Code : Line Light 3535A / 3535M



Light Sources	Power Per Meter	Luminous Per Meter	CCT Color Temperature	CRI Color Rendering Index
Mid-Power	12 Watt	1200 Lumen	3000 Kalvin	> 80
High-Power	24 Watt	2400 Lumen		
	48 Watt	5000 Lumen	4000 Kalvin	
High-Efficiency	24 Watt	3500 Lumen	6000 Kalvin	

Standards / CE / / /

Powered By :

Accessories

Fixtures


End Cap



Profile Dimensions	Width	Height	Length
Line Light 3535A	35 mm	35 mm	Per Order
Line Light 3535M	35 mm	35 mm	

Material / Profile: Anodized Aluminum / Diffuser : PMMA

Products Code : Line Light 5532 / 7635 / 9035

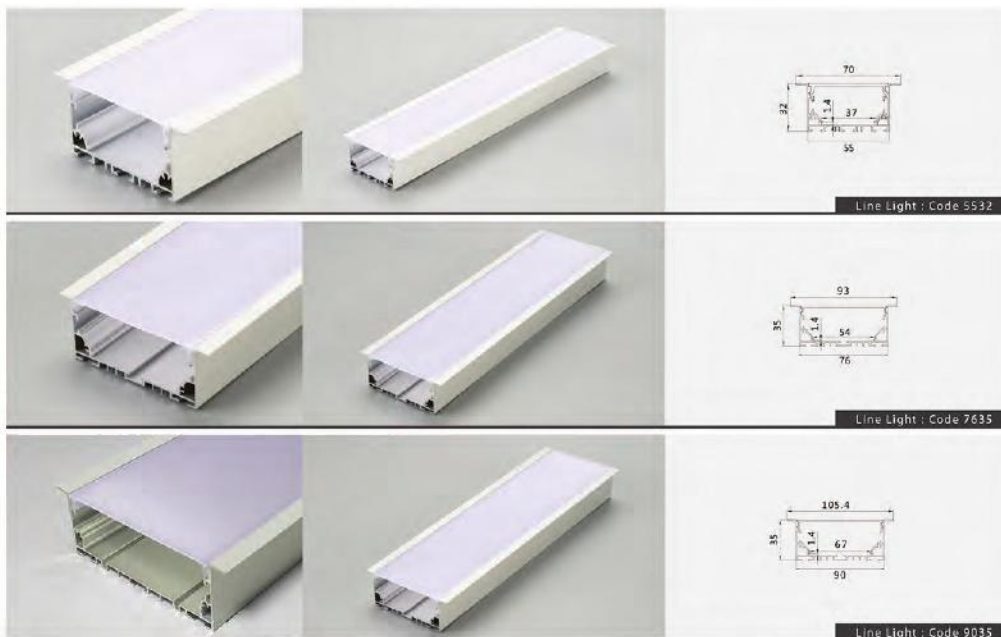

Light Sources	Power Per Meter		Luminous Per Meter		CCT Color Temperature		CRI Color Rendering Index
Mid-Power	12	Watt	1200	Lumen	3000	Kelvin	> 80
	24	Watt	2400	Lumen			
High-Power	24	Watt	2500	Lumen	4000	Kelvin	
	48	Watt	5000	Lumen			
High-Efficiency	24	Watt	3500	Lumen	6000	Kelvin	
	48	Watt	7000	Lumen			


Standards / CE / RoHS / ENEC / UL

Powered By: 

Accessories	Fixtures	End Cap
Line Light 5532 Line Light 7635 Line Light 9035		

Profile Dimensions	Width	Height	Length
Line Light 5532	55 mm	32 mm	Per Order
Line Light 7635	76 mm	35 mm	
Line Light 9035	90 mm	35 mm	

Material / Profile: Anodized Aluminum / Diffuser : PMMA

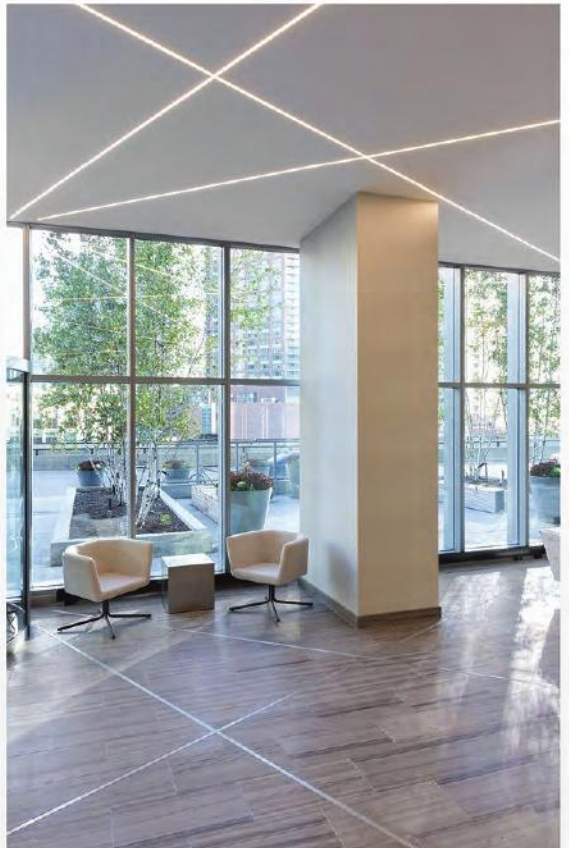

Products Code : Line Light 5575 / 10235




Light Sources	Power Per Meter		Luminous Per Meter		CCT Color Temperature		CRI Color Rendering Index
Mid-Power	12	Watt	1200	Lumen	3000	Kelvin	> 80
	24	Watt	2400	Lumen			
	36	Watt	3600	Lumen			
High-Power	24	Watt	2500	Lumen	4000	Kelvin	
	48	Watt	5000	Lumen			
	72	Watt	7500	Lumen			
High-Efficiency	24	Watt	3500	Lumen	6000	Kelvin	
	48	Watt	7000	Lumen			
	72	Watt	10500	Lumen			

Accessories	Fixtures	End Cap
Line Light 5575		
Line Light 10235		

Profile Dimensions	Width	Height	Length
Line Light 5575	55 mm	75 mm	Per Order
Line Light 10235	102 mm	35 mm	

Material / Profile: Anodized Aluminum / Diffuser : PMMA

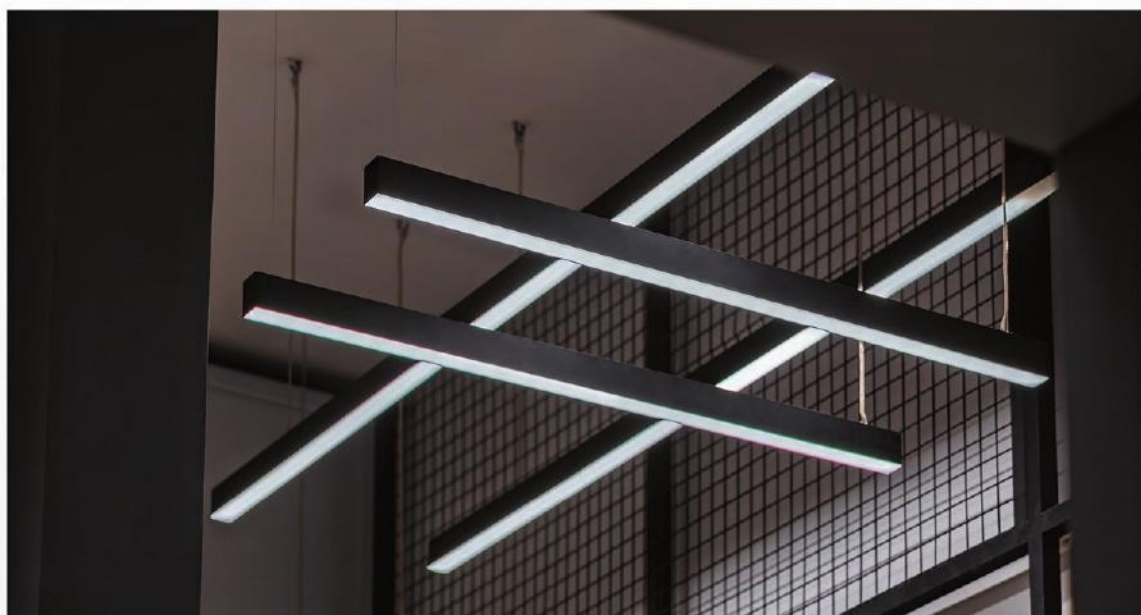

Product Code : Line Light Curve 1807



Light Sources	Power Per Meter	Luminous Per Meter	CCT Color Temperature	CRI Color Rendering Index
Mid-Power	11 Watt	1200 Lumen	3000 Kelvin	> 80
High-Power	23 Watt	2500 Lumen	4000 Kelvin	
High-Efficiency	23.4 Watt	3500 Lumen	6000 Kelvin	

Standards / CE / RoHS / A++ / ENEC

Powered By: 

Accessories

Fixtures

End Cap

Line Light Curve1807



Profile Dimensions

Width

Height

Length


Line Light Curve1807


18 mm

7mm

Per Order

Material / Profile: Anodized Aluminum / Diffuser : PMMA

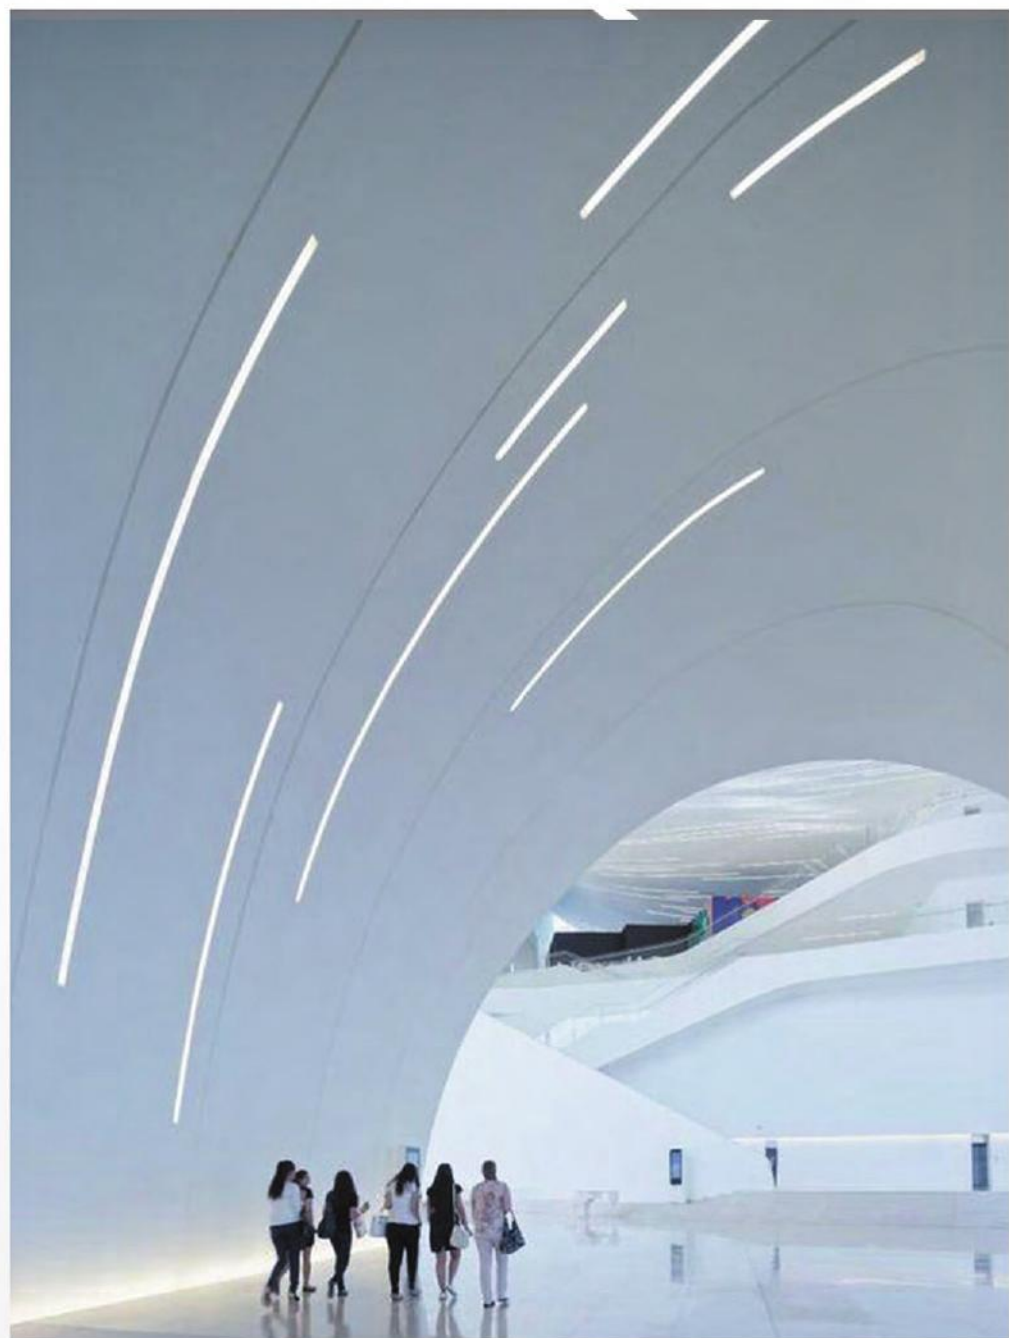

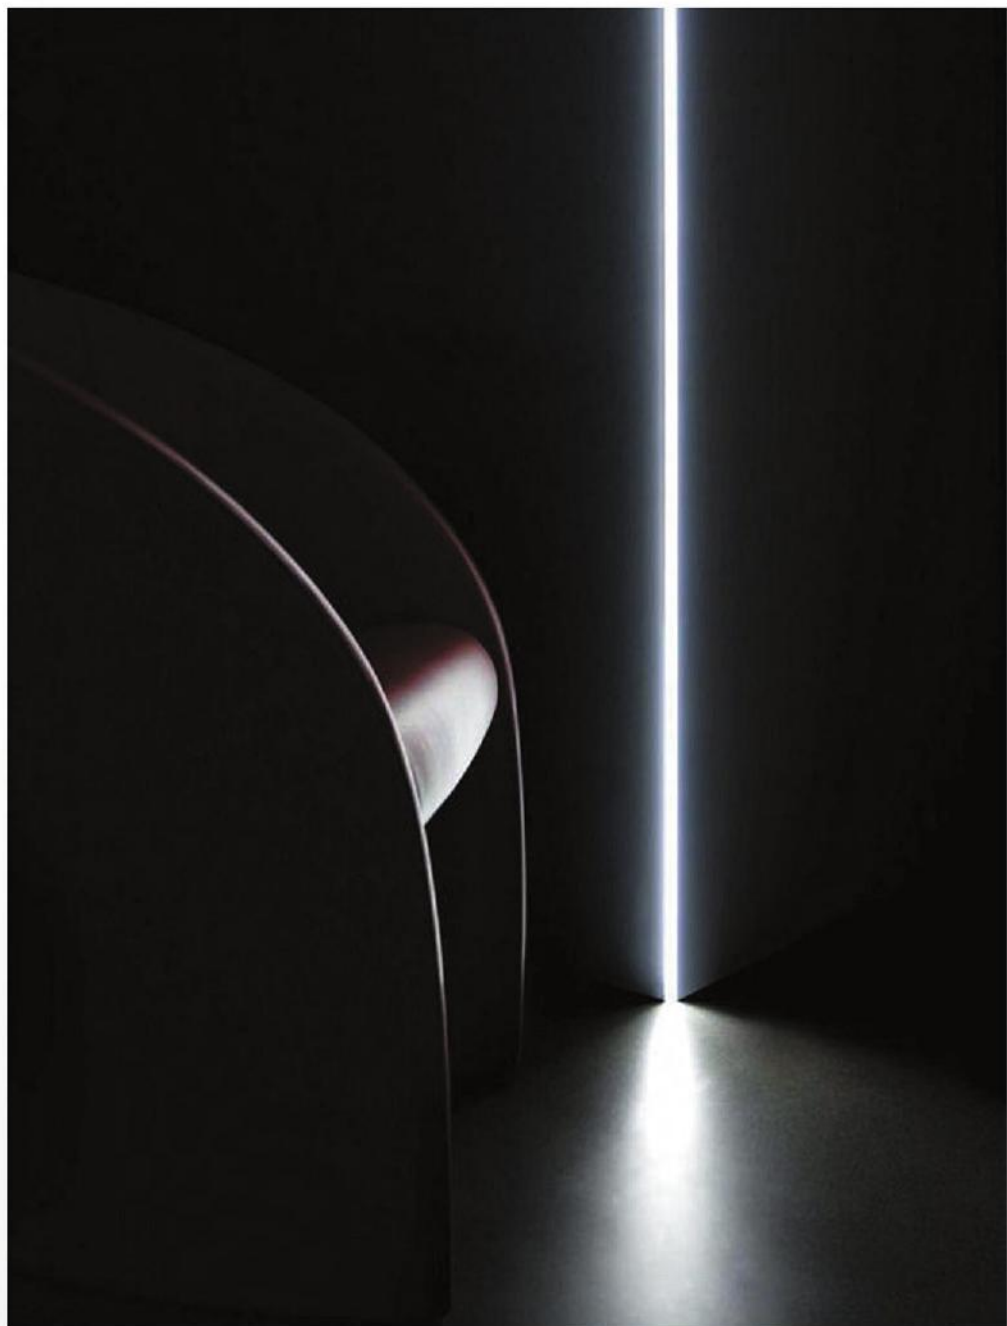

Products Code : Line Light R60 / R30



Light Sources	Power Per Meter		Luminous Per Meter		CCT Color Temperature		CRI Color Rendering Index
Mid-Power	12	Watt	1200	Lumen	3000	Kelvin	> 80
	24	Watt	2400	Lumen			
High-Power	24	Watt	2500	Lumen	4000	Kelvin	
	48	Watt	5000	Lumen	6000	Kelvin	
High-Efficiency	24	Watt	3500	Lumen			
	48	Watt	7000	Lumen			


Standards / CE / RoHS / REACH / WEEE

Powered By : **MW**
MIDWEST WORLD

Accessories	Fixtures	End Cap
Line Light R60		
Line Light R30		

Profile Dimensions	Width	Height	Length
Line Light R60	60 mm	60 mm	Per Order
Line Light R30	30 mm	30 mm	

Material / Profile: Anodized Aluminum / Diffuser: PMMA

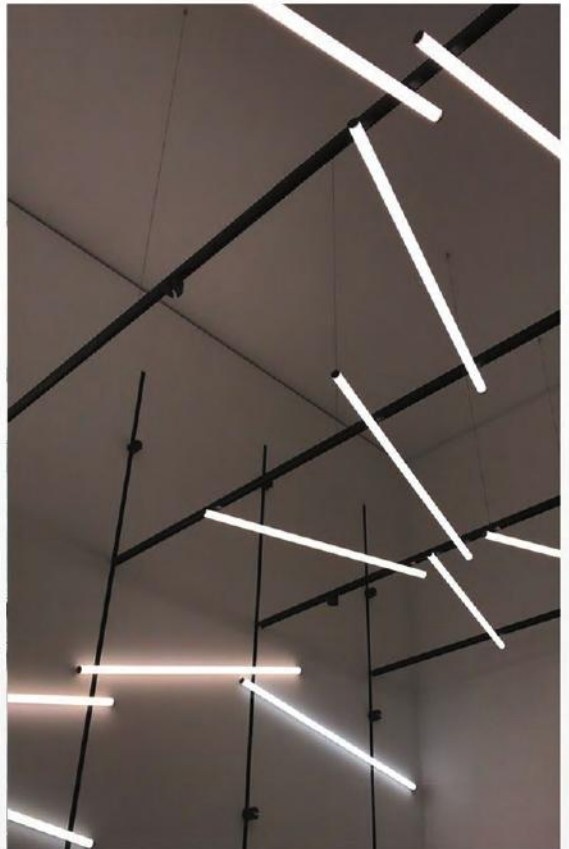

Product Code : Line Light Cubic1919



Light Sources	Power Per Meter		Luminous Per Meter		CCT Color Temperature		CRI Color Rendering Index
Mid-Power	11	Watt	1200	Lumen	3000	Kalvin	> 80
High-Power	23	Watt	2500	Lumen	4000	Kalvin	
High-Efficiency	23.4	Watt	3500	Lumen	6000	Kalvin	


Standards / CE / RoHS / A++ / 0


Powered By:  MW

Accessories	Fixtures	End Cap
Line Light Cubic1919		


Profile Dimensions	Width	Height	Length
Line Light Cubic1919	19 mm	19 mm	Per Order

Material / Profile: Anodized Aluminum / Diffuser : PMMA

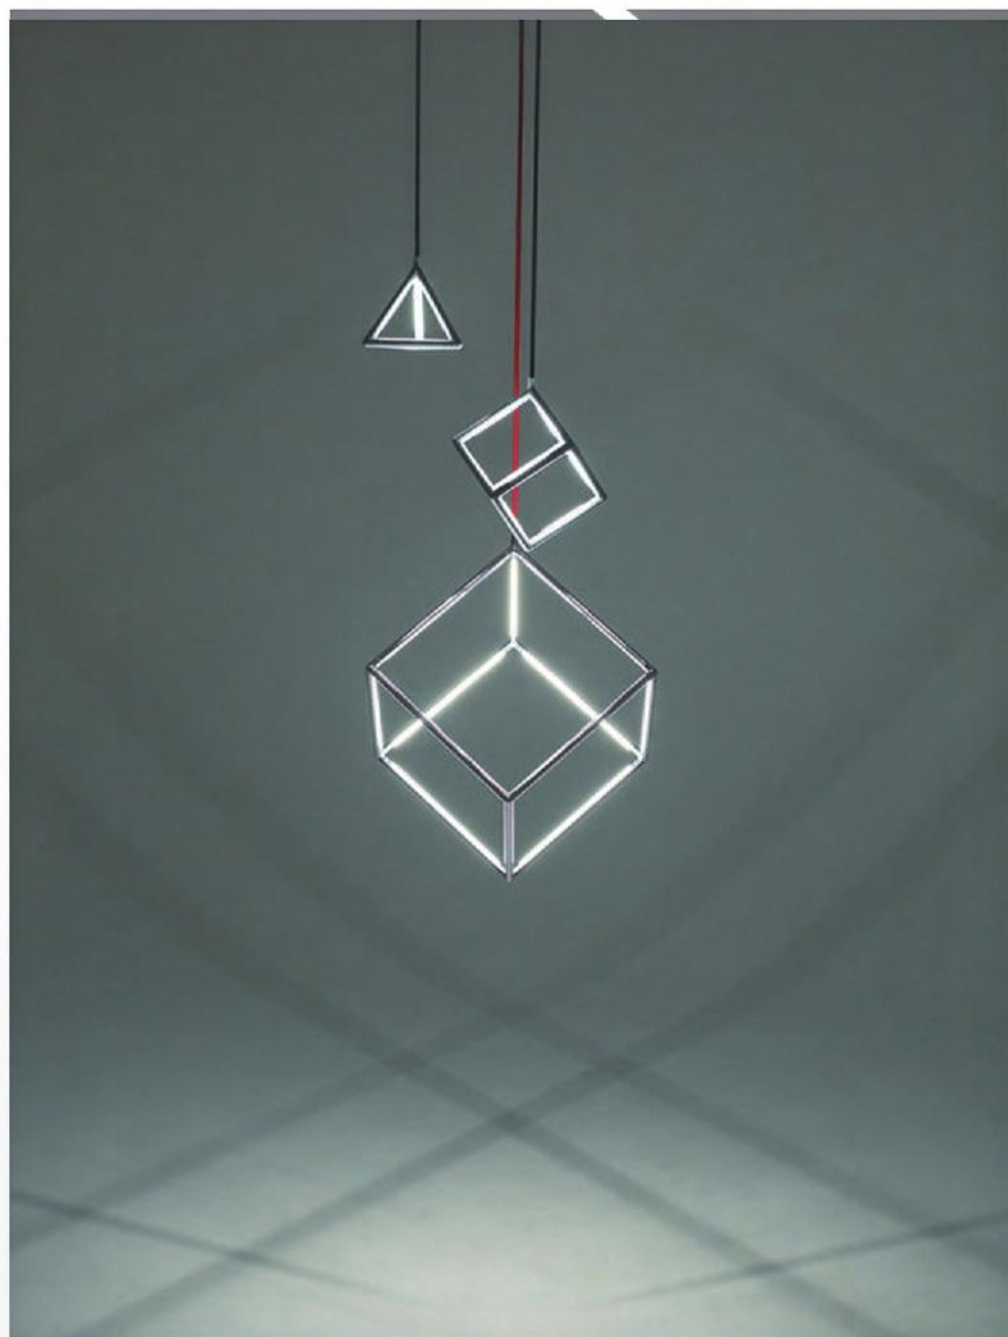

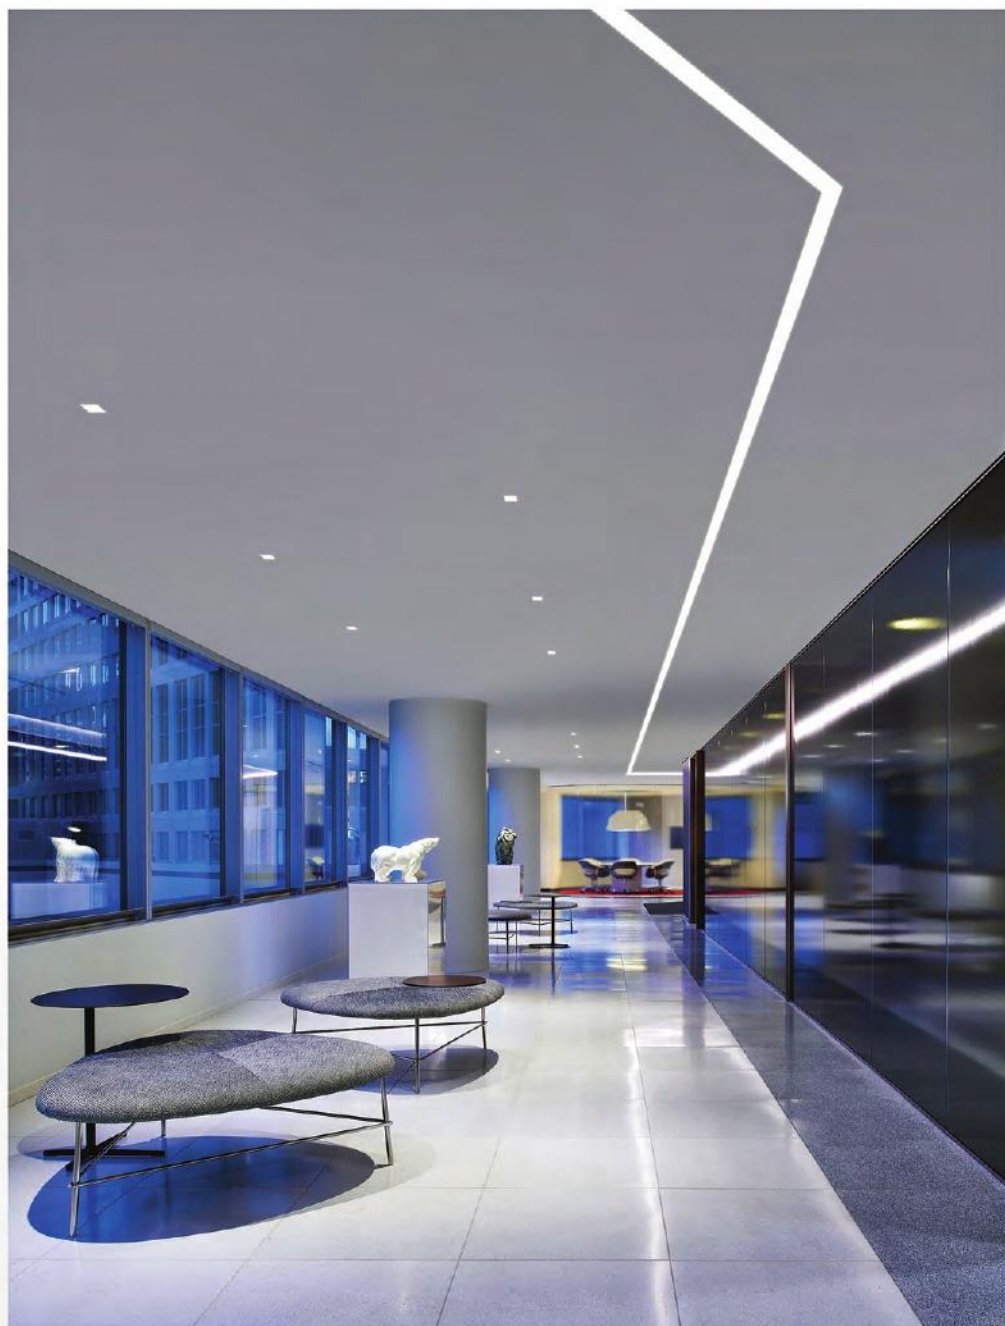

Product Code : Line Light Burried 632

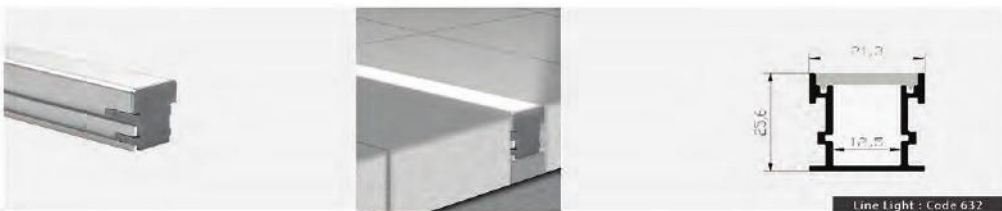

Light Sources	Power Per Meter		Luminous Per Meter		CCT Color Temperature		CRI Color Rendering Index	
Mid-Power	12	Watt	1200	Lumen	4000	Kalvin	> 80	IP68

Standards / CE / RoHS / REACH / UL

Powered By : 


Accessories	End Cap
Line Light Burried 632	

Profile Dimensions	Width	Height	Length
Line Light Burried 632	21 mm	26 mm	Per Order


Material / Profile: Anodized Aluminum / Diffuser : PMMA



Products Code : Flex Light



Product Code : TC



Color Temp: 3000k - 4000k

Length: 5 m



Power: 15 w/m

Luminous: 1600 lm/m

CRI > 80



Product Code : TB



Color Temp: 3000k - 4000k - 6000k

Length: Customized



Power: 1.5 w/m

Luminous: 700 lm/m

CRI > 80



Product Code : Tube 360



Color Temp: 4000 k

Length: 5 m

Power: 18 w/m

Luminous: 1200 lm/m

CRI > 80

